


USER GUIDE

BEFORE YOU START ASSEMBLING THE YAW2, WE SUGGEST TO ASK A FRIEND, FAMILY MEMBER OR A NEIGHBOR FOR SOME HELP. SINCE THE PARTS ARE LARGE AND RELATIVELY HEAVY, YOU MIGHT NEED SOME ASSISTANCE.

REMOVE ALL THE LABELS AFTER THE RELEVANT STEP IS FINISHED.

1


REMOVE THE FASTENING STRIPS FROM THE ROTATION, THEN THE TAPE PROTECTING THE CONNECTOR ON THE BOTTOM OF THE 2D.

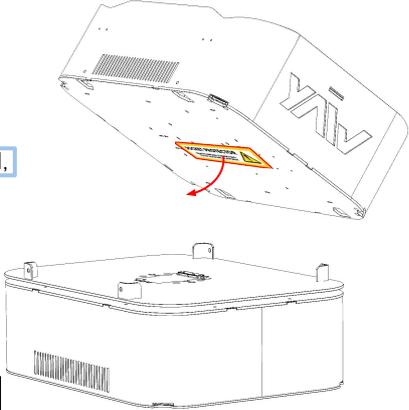

SKIP THIS STEP IF YOU DON'T HAVE THE ROTATION PLATFORM.

2


PLACE THE 2D ON THE ROTATION WITH THE ARROWS FACING EACH OTHER. THEN PUT THE DESIGN LEGS IN PLACE.

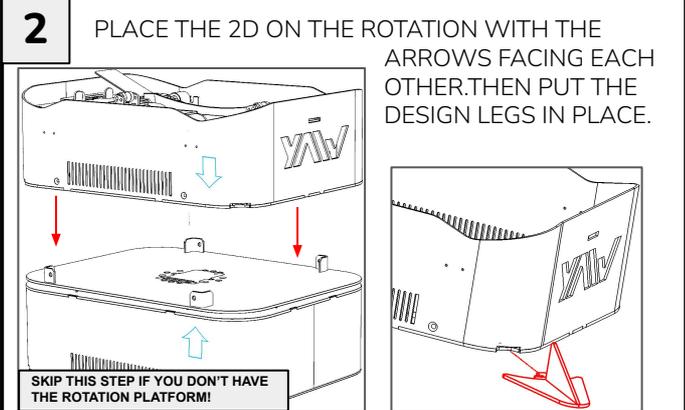

SKIP THIS STEP IF YOU DON'T HAVE THE ROTATION PLATFORM!

3

SCREW BOTH SIDES TOGETHER AS SHOWN ON THE DRAWING.

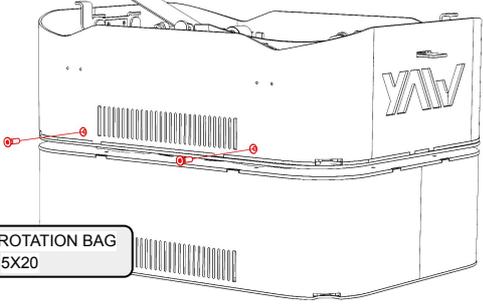


2D/ROTATION BAG
4 X 5X20

CONNECTION TEST: TURN THE SIMULATOR ON, WAIT UNTIL IT LIGHTS UP, THEN TURN IT OFF AND CONTINUE ASSEMBLY.

SKIP THIS STEP IF YOU DON'T HAVE THE ROTATION PLATFORM.


4

OPEN BOTH LOCKING MECHANISMS WHERE THE OPEN SIGN INDICATES IT.

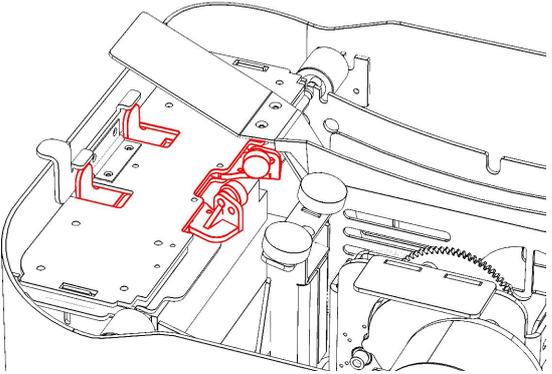

5


REMOVE THE FLAT CABLE CLAMPING STRAP AND HANG THE FLAT CABLE BACKWARDS.

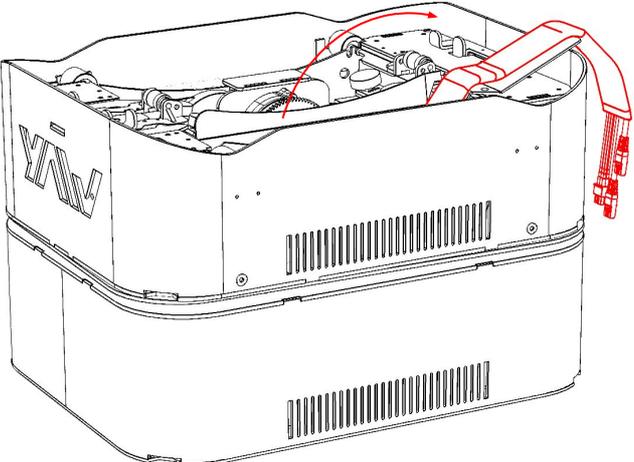

6

MAKE SURE THE 4 ROLLERS ARE IN PLACE.

IF THE ROLLERS FELL OUT, PUT THEM IN THE COMPARTMENTS CLOSER TO THE EDGES OF THE DEVICE

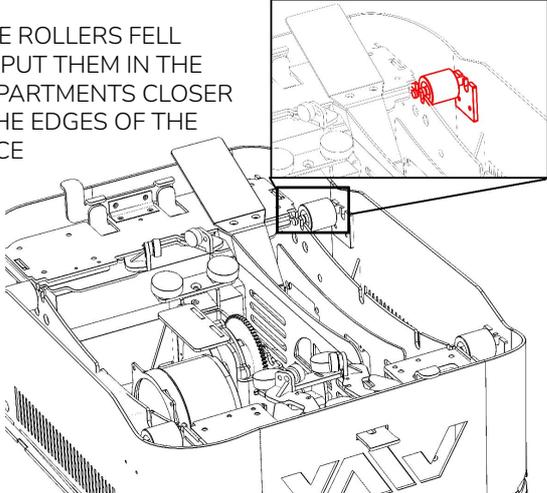


7 PLACE THE **PITCH** ON TOP AND MOVE IT BACK & FORTH, THEN CLOSE THE LOCKING MECHANISMS WHICH WERE OPENED IN STEP 4..


8 SUPPORT THE PITCH WITH THE SUPPORT PLASTIC. PUSH THE DEVICE BACKWARDS AND PLACE THE SUPPORT PLASTIC BETWEEN THE BACK OF THE

9 CONNECT THE FLAT CABLE IN THE BACK OF THE PITCH AND MOUNT THE **METAL SHEET** (IT'S IN THE HARDWARE PACK). TWO ALTERNATIVE DESIGN ARE POSSIBLE HERE.

1: IF YOU HAVE ONE RJ45 INPUT (SEE FIRST PICTURE), FOLLOW THESE STEPS

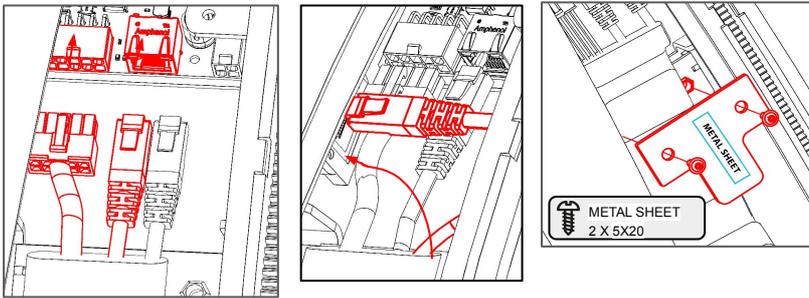

2: IF YOU HAVE TWO RJ45 INPUTS (SEE FIRST PICTURE), FOLLOW THESE STEPS

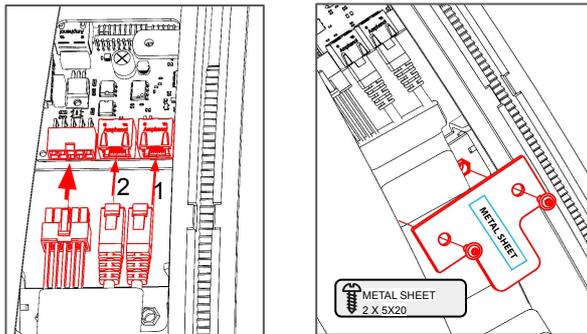


10

SCREW ON THE **PITCH DOOR** (IT'S IN THE HARDWARE PACK)


THEN YOU CAN REMOVE THE SUPPORT PLASTIC FROM STEP 8

11 INSERT THE **ROLL ARC** INTO THE PITCH, ACCORDING TO THE ARROWS WHILE PUSHING THE TOP OF THE ROLL ARC CONTINUOUSLY TOWARDS THE BACK OF THE PITCH.

THEN INSTALL THE BUMPER ON THE OTHER SIDE OF THE ROLL ARC

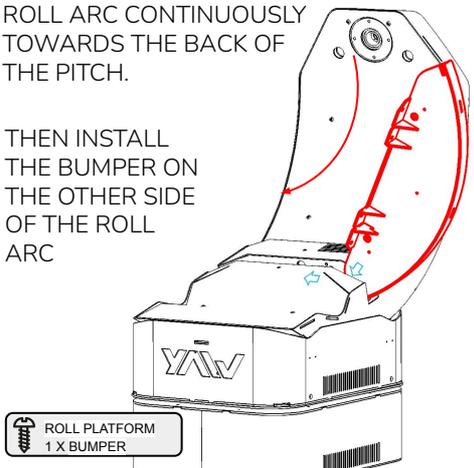

12 MOUNT THE SIDE RAIL ON THE **ROLL** (OPTIONAL, STEP "A1"). THEN MOUNT THE ROLL ON THE ROLL ARC SO THAT THE "FRONT" SIGNS ARE ALIGNED TO EACH OTHER. SCREW TOGETHER AS SHOWN IN THE PICTURE

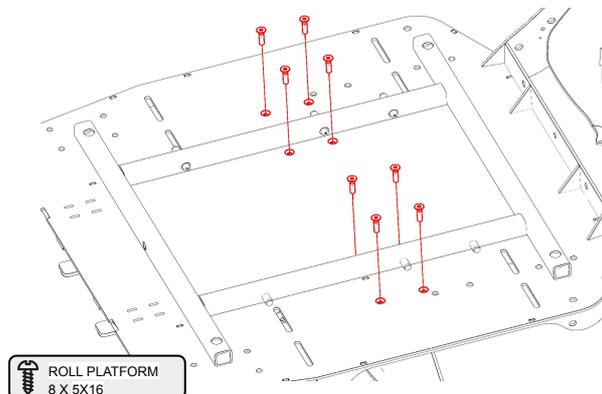

13 PULL THE CABLES COMING OUT OF THE PITCH THROUGH THE HOLES ON THE TOP OF THE ROLL. INSERT THE CENTRAL SHAFT OF THE PITCH INTO THE HOLE ON THE TOP OF THE ROLL AND SCREW IT TOGETHER.

ROLL BAG
3 X 6X10

14 CONNECT THE CABLES TO THE USB AND ELECTRICITY BOXES, THAT ARE PREINSTALLED ON THE SIDES OF THE ROLL. THEN ATTACH THE EMERGENCY SWITCH (ORANGE MAGNET) TO THE BOTTOM OF THE USB HUB

15 MOUNT THE SEAT ADAPTER TO THE BOTTOM OF THE SEAT

BOLTS IN THE SEAT

16 SLIDE THE SEAT INTO PLACE AND SECURE WITH THE 6X50 HEX HEAD BOLT IN THE FRONT.

ROLL BAG SEAT FIXER

17 UNZIP THE REAR PART OF THE SEAT AND BRING THE CABLE OUT FROM THE LEFT. REMOVE THE USB EXTENSION (1), THEN CONNECT THE 3 PIN CONNECTOR (2) COMING DOWN FROM THE PITCH.


18 MOUNT THE **FOOTHOLDER** ON THE **FOOTREST**. UNSCREW THE PREINSTALLED BOLTS FROM THE SIDE OF THE FOOTREST, MOUNT THE FOOTHOLDER, THEN REINSERT THE BOLTS.

FOOTHOLDER
2 x ADJUSTER 5X16

FOOTHOLDER
4 x FIXER 5X16



19

PUSH THE ROLL IN THE RIGHT DIRECTION AND UNSCREW THE BOLT HOLDING THE FOOTREST, THEN REPEAT IN THE OTHER DIRECTION.

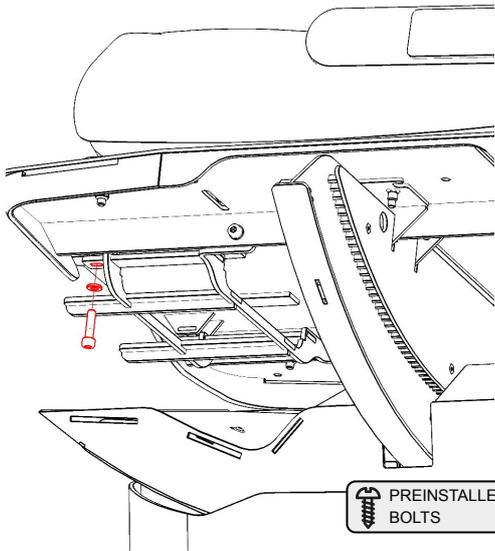

20

SLIDE THE FOOTREST INTO PLACE, LOOSELY TIGHTEN THE BOLTS, THEN SIT IN THE SEAT AND PLACE YOUR FEET IN A COMFORTABLE POSITION AT THE PREFERRED LENGTH.

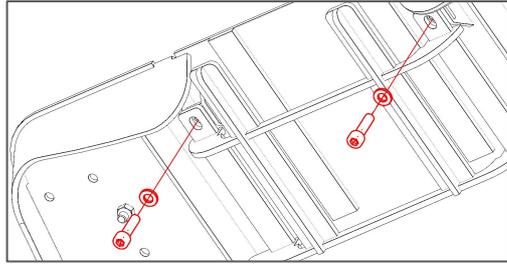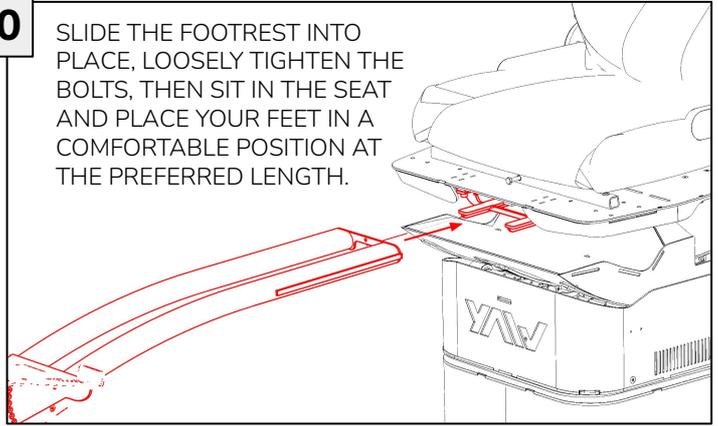

THEN TIGHTEN THE BOLTS HOLDING THE FOOTREST.

SOFTWARE GUIDE

CONFIG APP: FROM THE LINKS BELOW YOU CAN DOWNLOAD THE YAW VR CONFIG APP TO CONNECT THE SIMULATOR TO THE LOCAL WIFI NETWORK (AUTOMATICALLY CONNECTED IF YOU USE CABLE CONNECTION) YOU CAN ALSO SET ALL OTHER IMPORTANT PARAMETERS WITH IT. UNDER THE "WINDOWS" LINK YOU CAN FIND OTHER SOFTWARE LIKE OUR GAME ENGINE, EMULATOR AND SDK FOR PC. IN THE BOTTOM RIGHT CORNER YOU FIND THE SOFTWARE USER MANUAL AND OTHER INFORMATION AND HELP. IF YOU HAVE ANY PROBLEMS, PLEASE CONTACT US AT SUPPORT@YAWVR.COM.



USER MANUAL, ASSEMBLY GUIDE




YAWVR.COM/HELP-YAW2

YAW2 ACCESSORIES

A1



SIDE RAIL: MOUNT THE SIDE RAIL PART ON THE ROLL PLATFORM. YOU CAN MOUNT TO BOTH SIDES, AS YOU PREFER

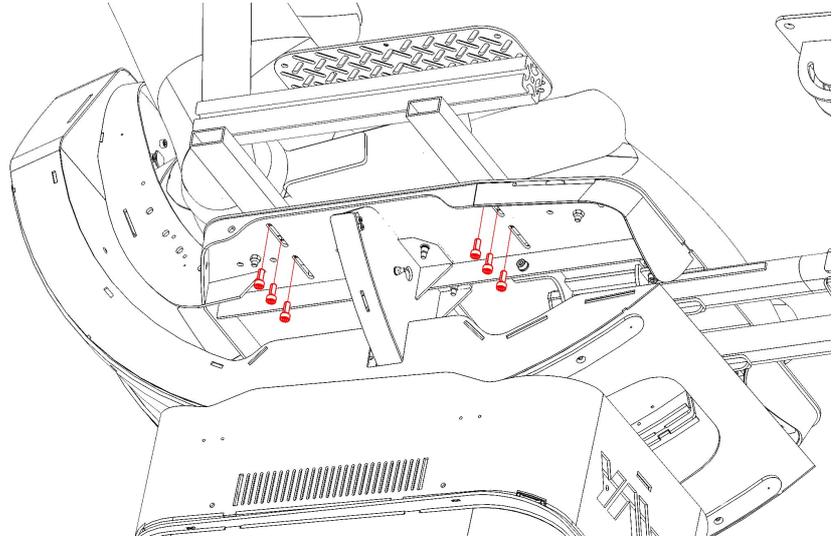

PREINSTALLED BOLTS

B1

CENTRAL MOUNT: MOUNT THE OMEGA PLATE (B) WITH THE 5X16 BOLT AND AN M5 WASHER ON THE MARKED SIDE OF THE CONSOLE BRACKET (A), THEN MOUNT THE GAMING PLATE (C) WITH THE 5X12 BOLT ON TOP OF IT. MOUNT IT ON THE FOOTREST. IN THE BAG YOU FIND 2 MORE LOCK WASHERS. YOU CAN USE THESE FOR A MORE STABLE FIXATION AT HAND KNOBS. PLEASE NOTE, THIS MAY DAMAGE THE PAINT.

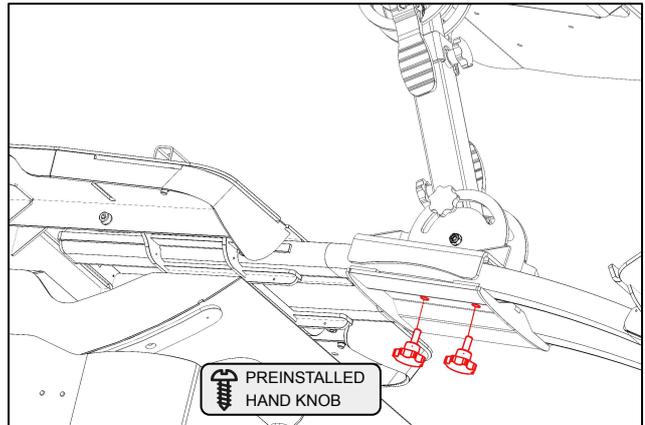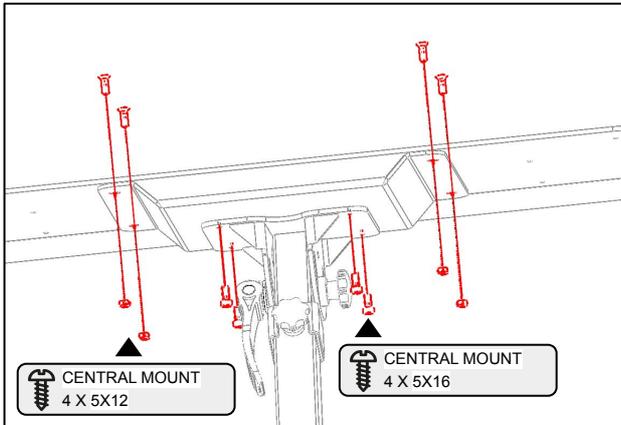

PREINSTALLED HAND KNOB

Get it on
Google play



Download on the
App Store



Download on the
Windows Store



**USER MANUAL,
ASSEMBLY GUIDE**



YAWVR.COM/HELP-YAW2